

the new millenium range of low profile septic tanks

performance durability



Adare Biocare Ltd

Tynedale House
Clonshire, Croagh,
Co Limerick

P:+353 (0) 61-395819

www.adarebiocare.com

features and benefits

low profile design for a shallow dig, durable polyethylene structure, lockable pedestrian access cover, variable invert level CE approved and tested to EN 12566-1, pre-filter prolonging lifespan of drainage field, automatic outlet cut-off when cleaning filter



Secure access

Pedestrian cover
Lockable closure



PF 17 edge-type prefilter:

High retention of coarse and floating material, easy to clean.



HDPE septic tank

Specifications	Length (in m)	Width (in m)	Height (in m)	Weight (in kg)	Ø access (in mm)	INLET height to base (in m)	OUTLET height to base (in m)	Pipe Dia. (in mm)
MILL. 3 m ³	2,42	1,47	1,50	126	400	1,30	1,27	100
MILL. 4 m ³	2,47	1,66	1,70	157	400	1,50	1,48	100
MILL. 5 m ³	2,48	1,89	1,86	161	400	1,68	1,65	100



OPERATING PRINCIPLE

The septic tank collects all of the domestic wastewater and traps solids. The built-in prefilter installed at the outlet traps coarse particles.

COMMISSIONING USE AND MAINTENANCE

Follow the instructions provided in the INSTALLATION AND OPERATING MANUAL (delivered with each septic tank and/or provided upon request).




Conder Solutions

2 Whitehouse Way, South West Industrial Estate, Peterlee, Co Durham, SR8 2RA

Tel: +44 (0) 8702 640004, Fax: +44 (0) 8702 640005, Email: sales@conderproducts.com Webpage: www.conderproducts.com

© 2013 Conder Solutions Ltd

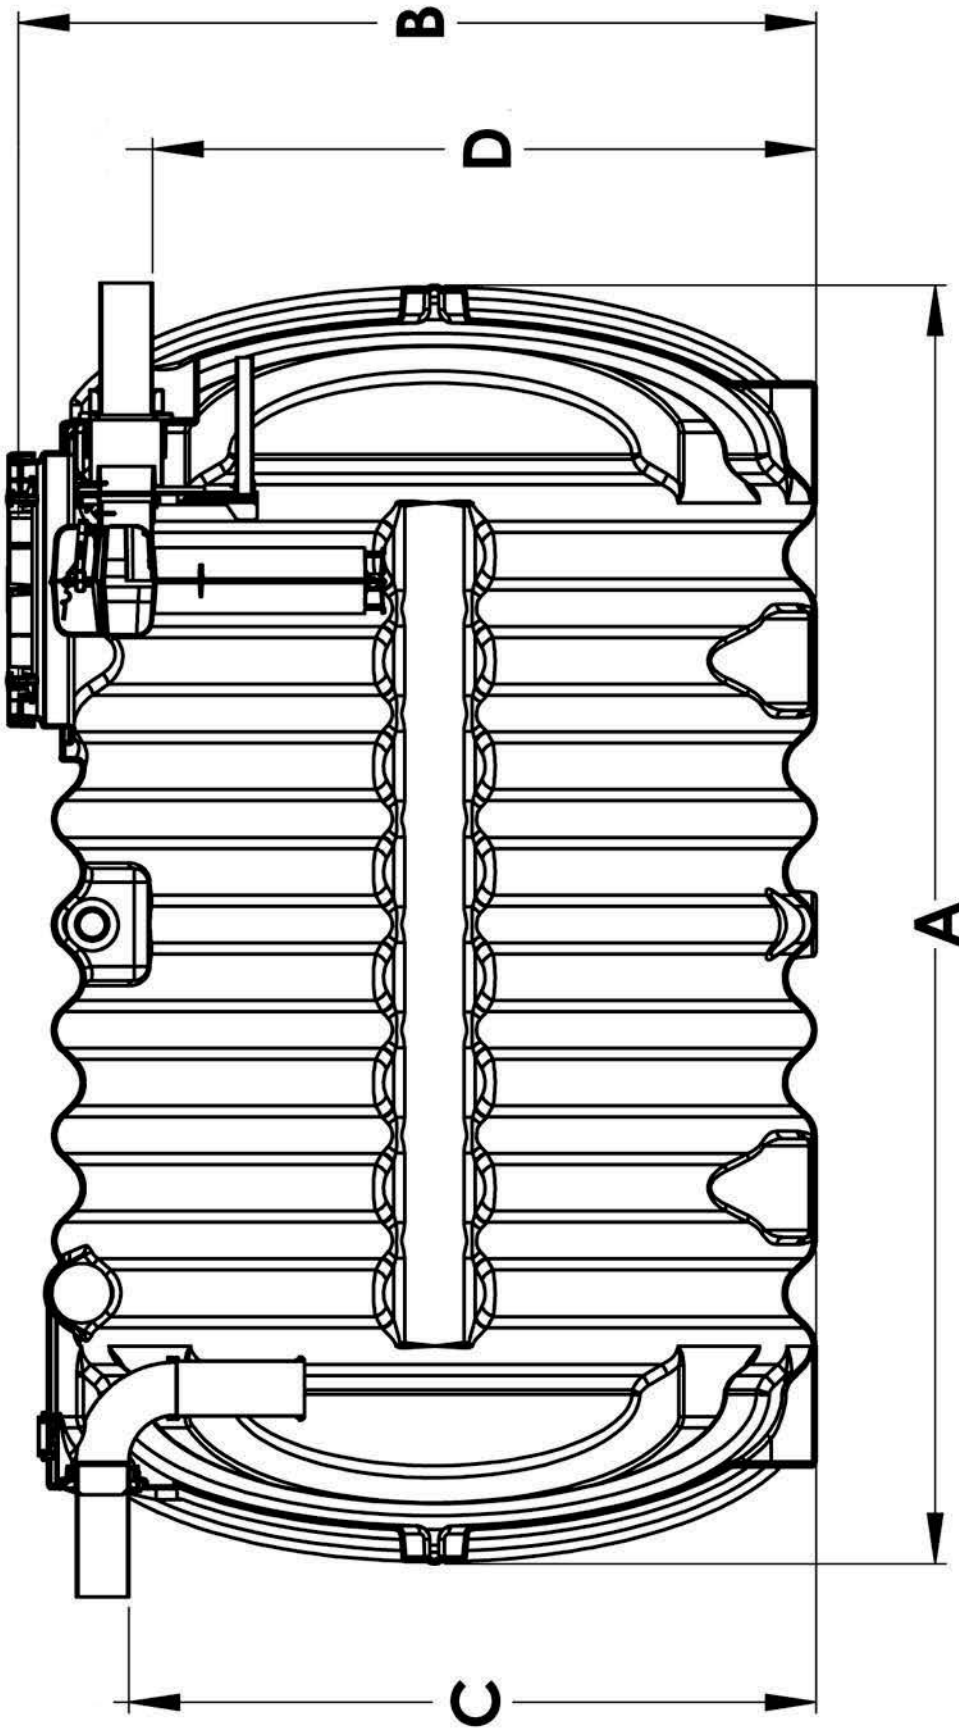

Specifications	(A) LENGTH (in m)	WIDTH (in m)	(B) HEIGHT (in m)	Pipe dia (in mm)	(C) INLET height to base (in m)	(D) OUTLET height to base (in m)	Access (in mm)	WEIGHT (in kg)
3 m ³	2.42	1.47	1.50	100	1.30	1.27	400	126
4 m ³	2.47	1.66	1.70	100	1.50	1.48	400	157
5 m ³	2.48	1.89	1.86	100	1.68	1.65	400	161

Adare Biocare Ltd

Tynedale House
Clonshire, Croagh,
Co Limerick

P:+353 (0) 61-395819

www.adarebiocare.com