


A
B
C
D
E
F


1 2 3 4 5 6

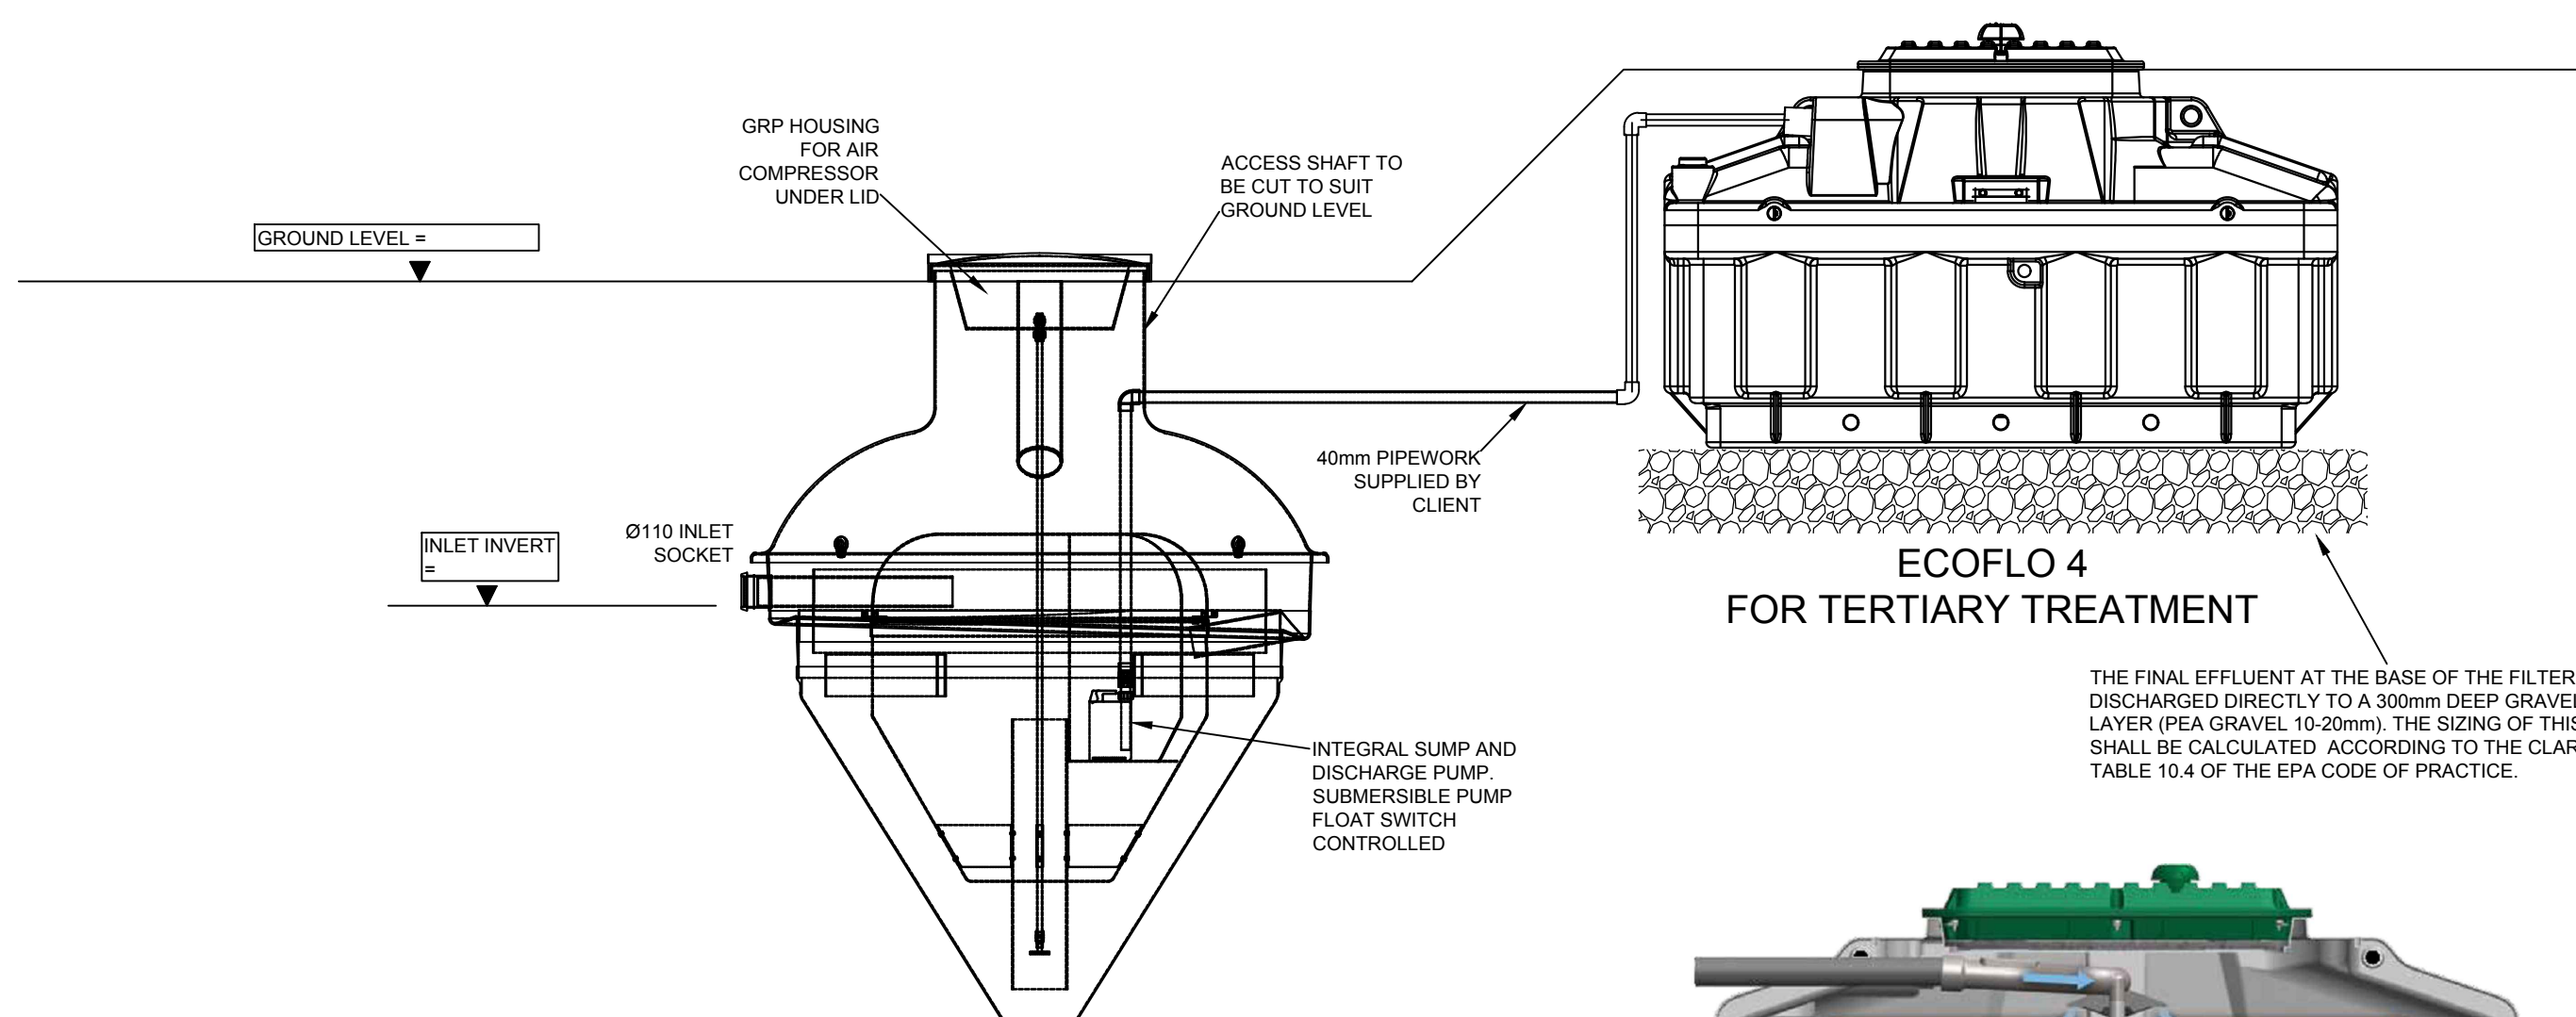

ASP06-EPS DESIGN WITH PUMPED OUTLET

NOTES:

1. FOR FURTHER SPECIFICATIONS, PLEASE REFER TO COMMERCIAL BROCHURE.
2. FOR INSTALLATION, FOLLOW INSTRUCTIONS IN THE O&M MANUAL.
3. ALL DETAILS AS PER EPA CODE OF PRACTICE.
4. ALL WORK OTHER THAN COMMISSIONING BIO TREATMENT UNIT DONE BY OTHERS.

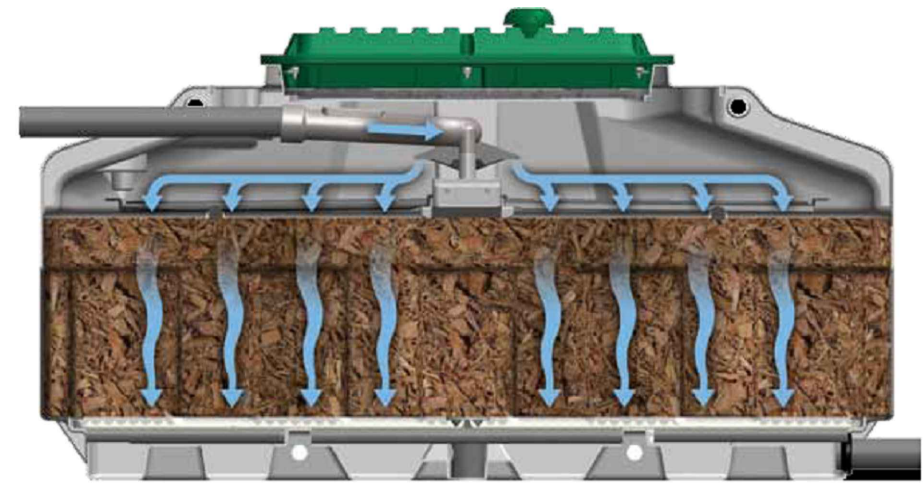

B	21.09.15	LT	KB	RP	GRAVEL DISTRIBUTION LAYER ADDED
A	28.08.15	LT	RP	-	ISSUED FOR INFORMATION
REV.	DATE	BY	CHKD.	APPD.	DESCRIPTION
				GENERAL TOLERANCES (unless noted otherwise) GRP FABRICATED ± 5mm MACHINED ± 2mm ± 0.5mm ANGLE ± 0.5° ± 0.2° ± 0.1°	
FOR INTERNAL USE ONLY A3		DO NOT SCALE IF IN DOUBT ASK ALL DIMENSIONS IN MM		THIS DRAWING IS THE PROPERTY OF PREMIER TECH AQUA Ltd. AND IS NOT TO BE COPIED IN PART OR WHOLE WITHOUT WRITTEN PERMISSION	

TITLE GENERAL ARRANGEMENT FOR A ASP06-P-EPS DESIGN + ECOFLO4 SCHEME					
DRAWN BY LT	CHKD. RP	APPD. -	SCALE NTS	DRAWING No. ASP06-P + ECOFLO4	REVISION B
DATE 28.08.15	DATE 28.08.15	DATE -			

IMPORTANT INVERT LEVEL NOTE (RIBBED TANKS ONLY!):
 The inlet and outlet Invert Level(IL) shown on this drawing is to internals of the shell unless otherwise stated.
 For Invert level to the outside of the shell ribs, see the conversion below:
 Ø1.0m, 1.2m, 1.5m, 1.8m, 2.5m IL+50mm ('X')
 Ø3.0m, 4.0m IL+75mm ('X')

TANKS SUPPLIED WITH LOOSE SHAFTS DO NOT COME SUPPLIED WITH A FIXING KIT. THIS IS THE RESPONSIBILITY OF THE SITE CONTRACTOR.

